

CAPACITOR CONSTRUCTION TYPE: FEC/HV/WF 10kV


These capacitors are constructed with polyester dielectrics and aluminium electrodes.

Wrapped with polyester tape, end filled with epoxy resin, fitted with a PVC sleeve.



Capacitor Specifications

Capacitance	See Chart
Capacitance Tolerance	5%, 10%, 20%
Rated Voltage	10kV DC
Temperature Range	-25°C to +85°C
Power Factor	0.01 @ 1K Hz
Termination	0.8 mm T.C.W
Voltage Rise Time	> 500 v/us
Temp Coefficient	400 p.p.m /°C
Test Voltage	1.25 x Working Voltage

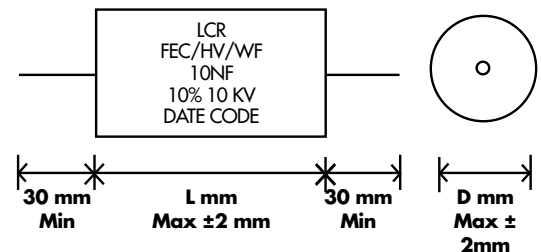

Value	Length (mm)	Diameter (mm)
Up to 5nF	42	13
5.1nF - 7.5nF	42	14.5
7.6nF - 10nF	42	17.5
10.1nF - 22nF	42	25
22.1nF - 35nF	52	27
35.1nF - 47nF	52	31
47.1nF - 68nF	62	33
68.1nF - 75nF	62	34
75.1nF - 100nF	62	39