

## CAPACITOR CONSTRUCTION TYPE: FEC/HV/WF 20kV


**These capacitors are constructed with polyester dielectrics and aluminium electrodes.**

**Wrapped with polyester tape, end filled with epoxy resin, fitted with a PVC sleeve.**



### Capacitor Specifications

Capacitance	See Chart
Capacitance Tolerance	5%, 10%, 20%
Rated Voltage	20kV DC
Temperature Range	-25°C to +85°C
Power Factor	0.01 @ 1K Hz
Termination	0.8 mm T.C.W
Voltage Rise Time	> 500 v/us
Temp Coefficient	400 p.p.m /°C
Test Voltage	1.25 x Working Voltage

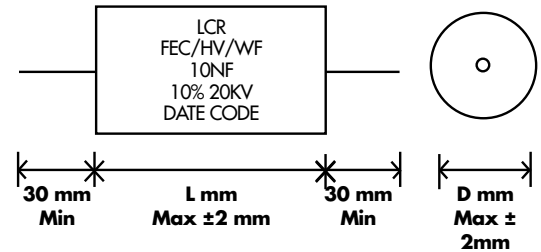

Value	Length (mm)	Diameter (mm)
Up to 5NF	55	26
5.1nF - 10nF	55	31.5
10.1nF - 15nF	75	31.5
15.1nF - 20nF	75	35
20.1nF - 25nF	75	39
25.1nF - 47nF	75	53